
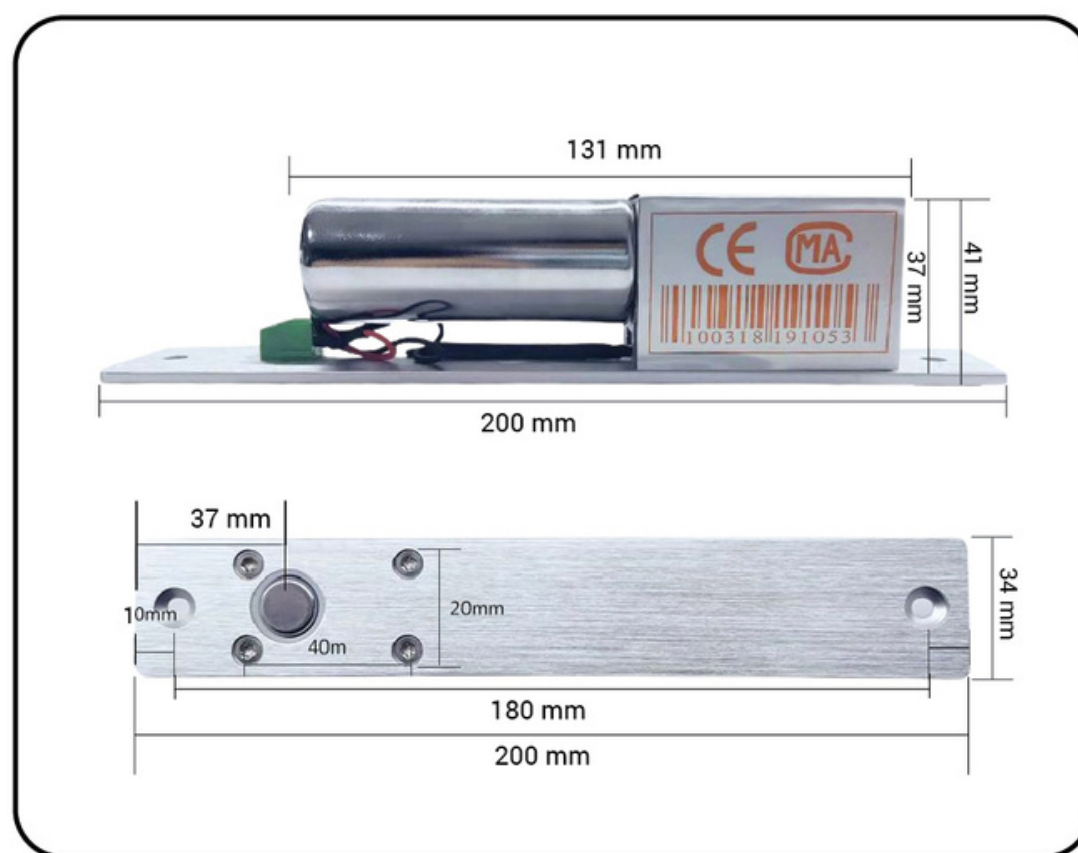


XENUS ELECTRIC BOLT LOCK


**Full Glass / Frameless
Electric Bolt Lock**

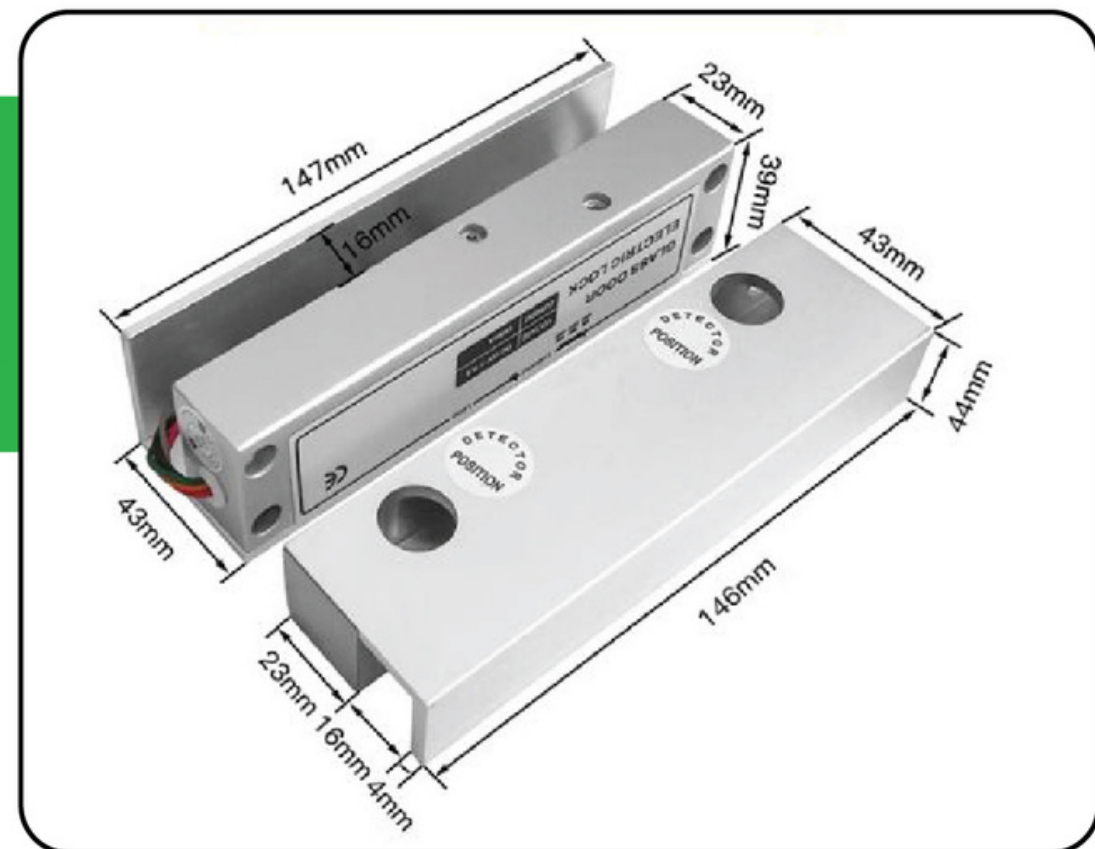

**Frame Door
Electric Bolt Lock**

Lock Instructions

Applicable product: LX normal temperature electric bolt lock

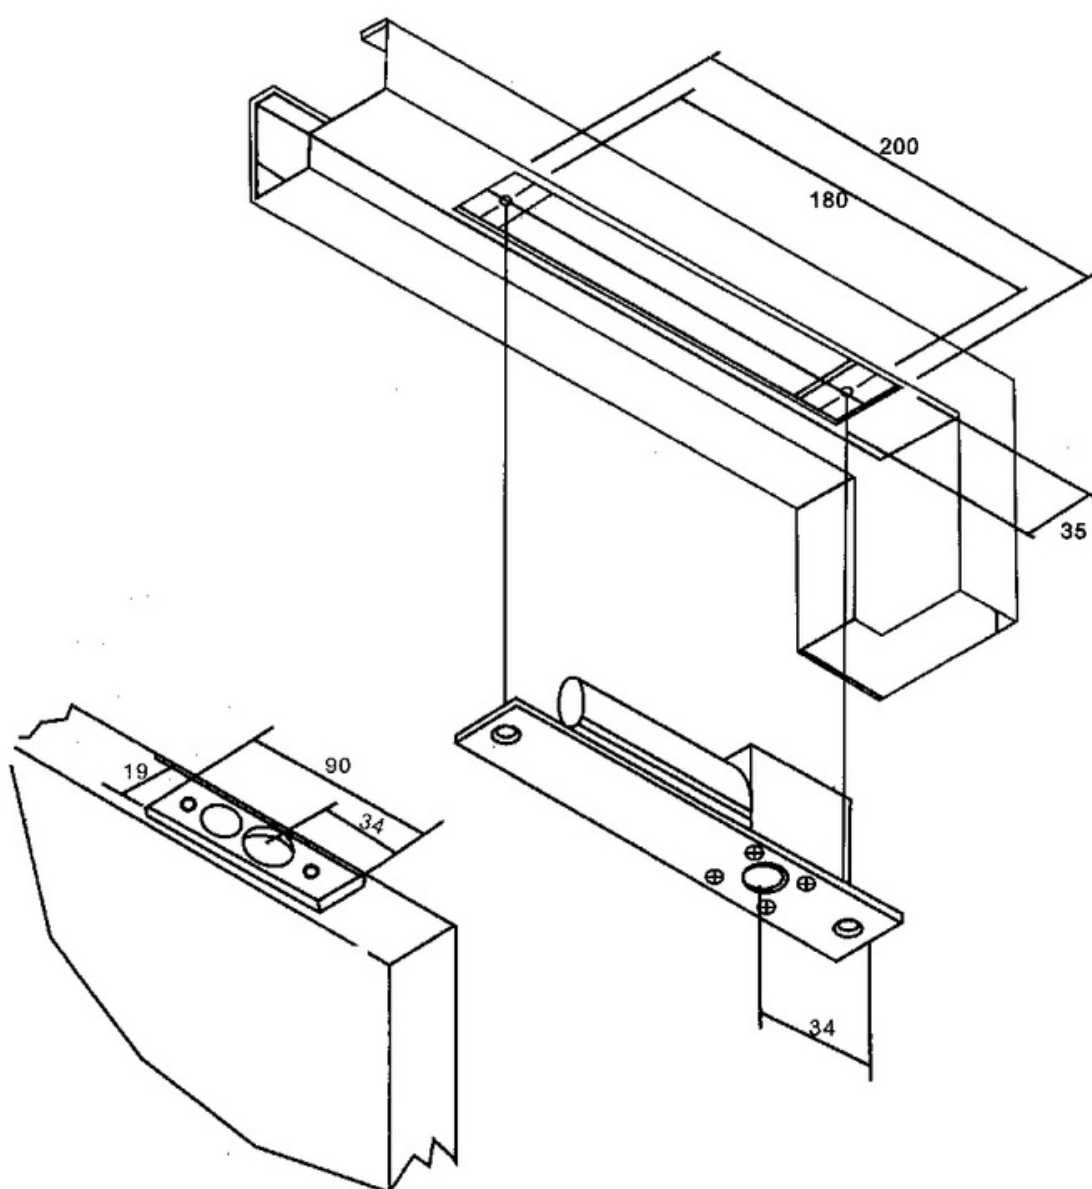

MAIN CHARACTERISTICS

Working voltage	12VDC		
		Black	power supply positive (+)
		Black	power supply positive (-)
Working current	Starting current		420mA±10%
	Steady current		350mA±10% (locking completely)
Coil type	Continuous working		
Safety type	Power-on lock, Power-off unlock		
Lock core	Diameter 15mm srainless lock core, protruding length 15mm		
Locking Mode	5MP 1/2.8" Progressive Scan CMOS		

PACKING LIST

Electric bolt lock	A handful of
Panel cover	A block
Inducting locker	A block
Screw	A packet of
Manual instruction	A piece of
Certificate of confromity	A piece of


Glass Door Lock Electric Bolt

Type of Installation

Full Glass / Frameless Electric Bolt Lock



Frame Door Electric Bolt Lock

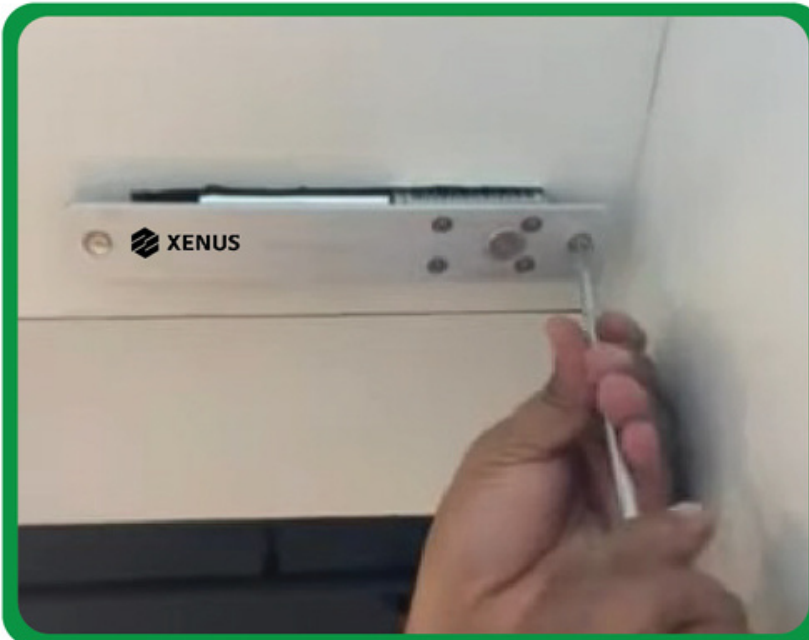

Accessory Frame Door Electric Bolt Lock



Sole Distributor by :



PT. GLORI ABADI PERKASA